



# American Flamecoat Testing

521 Eagleton Downs Dr.  
Suite F  
Pineville, NC 28134  
704-543-0903

Client: Lori Weitzner Design  
54 W. 21<sup>st</sup> Street  
New York, NY 10011

Test Report No: 75200

Date: 2-21-2011

The Following sample was submitted by the client as: Parchment


LETTERA

DATE OF RECEIPT: 2-18-2011

TESTING PERIOD: 2-21-2011

TEST REQUESTED: The submitted sample was tested for flammability in accordance with the procedures outlined in ASTM E-84-98.

SIGNED





# American Flamecoat Testing

521 Eagleton Downs Dr.  
Suite F  
Pineville, NC 28134  
704-543-0903

Lori Weitzner Design  
54 W. 21<sup>st</sup> Street  
New York, NY 10011

#75200  
Date: 2-21-2011

## **INTRODUCTION:**

This report presents test results of Flame Spread and Smoke Developed Value per ASTM E-84-98. The report also includes Material Identification, Method of Preparation, Mounting and Conditioning of the specimens.

The test were performed in accordance with the specifications set forth in ASTM E-84-98, Standard Test Method for Surface Burning Characteristics of Building Materials, both as to equipment and test procedures. This test procedure is similar to UL-723, ANSI NO. 2.5, NFPA No. 255 and UBC 42-1.

The test results cover two parameters: Flame Spread and Smoke Developed Values during the 10-minute fire exposure. Inorganic cement board and red oak flooring are used as comparative standards and their responses are assigned arbitrary values of 0 and 100 respectively.

## **PREPARATION AND CONDITIONING: Untreated**

Shur-stik III Vinyl Wallcovering Adhesive was applied to three (3) 2-feet x 8-feet sections of IC board. The sample was placed over the adhesive and allowed to cure.

The sample was conditioned at 73 +/- 5 Fahrenheit and 50 +/- relative humidity.

## **TEST PROCEDURE: Adhered**

The tunnel was thoroughly pre-heated by burning natural gas. When the brick temperature, sensed by a floor thermocouple, had reached the prescribed 105 Fahrenheit +/- 5 Fahrenheit level, the sample was inserted in the tunnel at test conducted in accordance with the standard ASTM E-84-98 procedures.

The operation of the tunnel was checked by performing a 10-minute test with inorganic board the day of the test.



# American Flamecoat Testing

521 Eagleton Downs Dr.  
Suite F  
Pineville, NC 28134  
704-543-0903

Lori Weitzner Design  
54 W. 21<sup>st</sup> Street  
New Yoek, NY 10011

#75200  
Date: 2-21-2011

## **TEST RESULTS:**

The test results, calculated in accordance with ASTM E-84-98 for Flame Spread and Smoke Developed Values are as follows:

Test Specimen: Parchment  
Flame Index\* 25  
Smoke Developed Value\* 240

**Observation: The Tested Fabric Meets the Requirments for ASTM E-84**

## **Rating: Class A**

The National Fire Protection Association Life Safety Code 101, Section 6-5.3, "Interior Wall and Ceiling Finish Classification", has a means of classifying materials with respect to Flame Spread and Smoke Developed when tested in accordance with NFPA 255, "Method of Test of Surface Burning Characteristics of Building Materials", (ASTM E-84)

The classifications are as follows:

Class A Interior Wall & Ceiling Finish:

Flame Spread- 0-25  
Smoke Developed- 0-450


Class B Interior Wall & Ceiling Finish:

Flame Spread- 26-75  
Smoke Developed- 0-450


Class C Interior Wall & Ceiling Finish:

Flame Spread- 76-200  
Smoke Developed- 0-450

Client: Lori Weitzner Designs  
Report No 75200  
Sample: Parchment

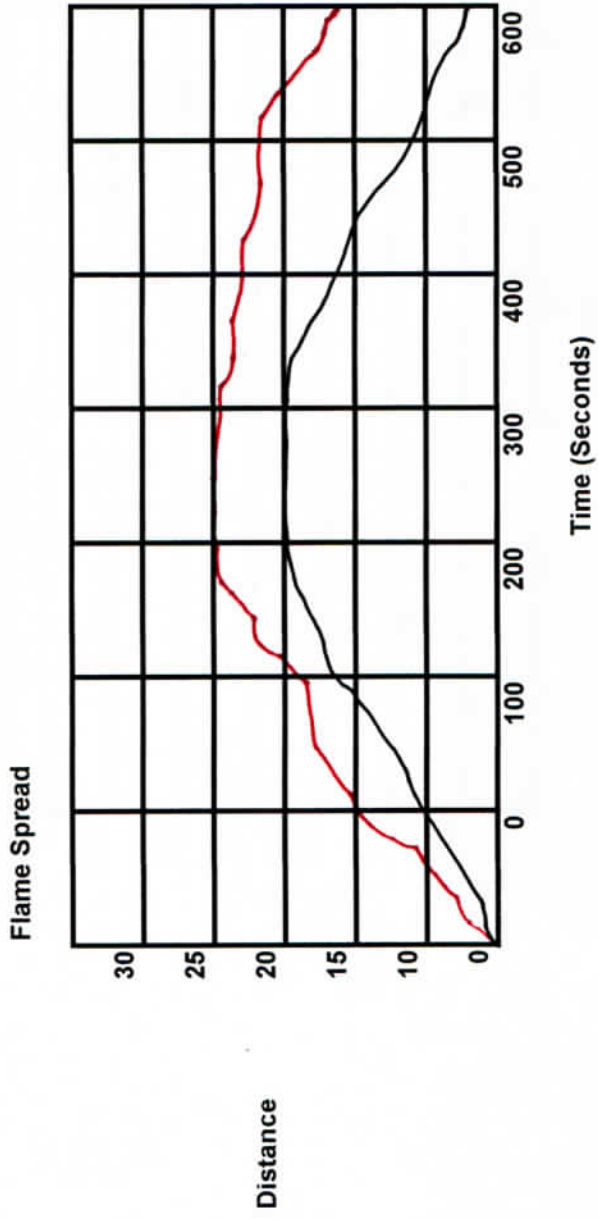

Client: Lori Weitzner Designs  
Report No 75200  
Sample: Parchment

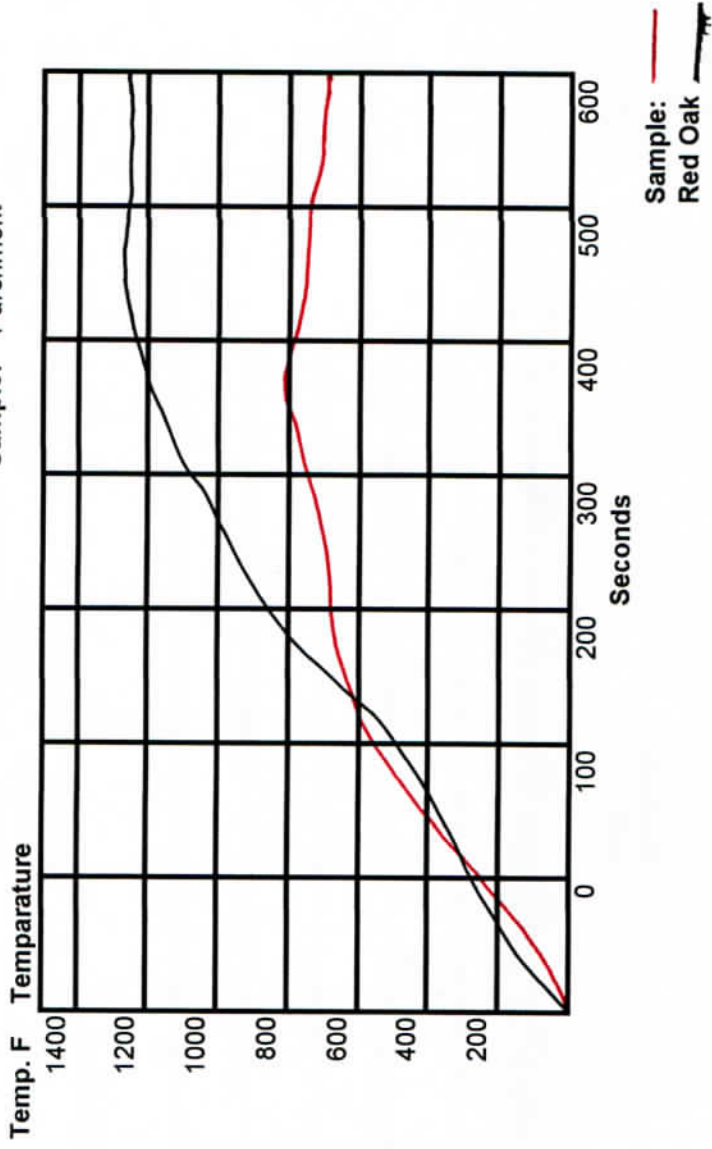

Client: Lori Weitzner Designs  
Report #: 75200  
Sample: Parchment

Smoke Developed:

